

Yes, we're NITTO SEIMO

Polyethylene Tailene Hard Knotless Netting,

Model : 3-SBK

(3-Strands Super Braided Knotless Netting)

You have never seen before the flat shape netting of our new Model: 3-SBK.

The features are more superior than conventional knotless and knotted nettings.

3-SBK have the following features :

Lower
resistance in the
sea due to its
shape.

It has
Stronger
Abrasion
resistance.

Compact
Volume
is more than
knotted net.

Crossing
sections do
not slip off.

Even if cut
the strand, it
does not
fray.

Manufactured by

NITTO SEIMO CO.,LTD.

2-20-15-701, Shimbashi, Minato-Ku,
Tokyo, Japan

Tel: +81-3-3572-5378 & Fax: +81-3-3572-5370

Distributed by

Unimar AS,

Verkstedveien 11, 6517 Kristiansund N Norway
Tel: +47 71 58 09 00 & Fax: +47 71 58 09 01
E-mail: post@unimar.no



3-SBK POLYETHYLENE TAILENE HARD KNOTLESS NETTING / DATA TABLE


Material : Polyethylene 600d, Colour : Peace Blue (The Shape of 3-SBK is Flat shape.)

* In the stretched Way, both of "Lengthwise" and "Depthwise" are available, but it depends on net's plan (MD x ML).

Size of Twine 600d 3/(3x3x3)ply	Diameter Equivalent to Size of Twine (Approx.) mm	Diameter of Cross Part of Netting (Approx.) mm	Breaking Strength of Straight Line on dry condition (Approx.) kgs	Weight (Approx) per piece 75MD (Maximum) x 10Meters. The Maximum Mesh Deep for 3- SBK is 75MD. *1 (Approx.) kgs	Minimum Mesh Size Centre - Centre (Approx.) mm	Maximum Length of Netting *2 (Approx.) Meters
81	4,1	5,0	190 kgs	13,2 kgs	60	370
108	4,7	6,0	250 kgs	17,5 kgs	60	275
135	5,3	6,0	315 kgs	21,8 kgs	60	220
162	5,8	7,0	380 kgs	26,2 kgs	60	180
189	6,2	9,0	440 kgs	30,5 kgs	60	155
216	6,6	9,0	500 kgs	34,9 kgs	60	135
243	7,1	10,0	570 kgs	39,3 kgs	60	120
270	7,4	10,0	630 kgs	43,6 kgs	60	105
297	7,8	11,0	680 kgs	48,0 kgs	60	98
324	8,1	11,0	740 kgs	52,4 kgs	60	89
351	8,5	13,0	800 kgs	56,7 kgs	60	82
378	8,8	14,0	850 kgs	61,1 kgs	60	76
405	9,1	15,0	910 kgs	65,5 kgs	60	70
432	9,4	15,0	970 kgs	69,8 kgs	60	66
459	9,7	16,0	1 020 kgs	74,2 kgs	70	62
486	10	16,0	1 080 kgs	78,5 kgs	70	58
513	10,2	16,0	1 130 kgs	82,9 kgs	70	54
621	11,3	18,0	1 350 kgs	100,4 kgs	80	44
729	12,2	20,0	1 550 kgs	117,8 kgs	80	37
864	13,3	21,0	1 790 kgs	139,6 kgs	90	30
918	13,7	22,0	1 900 kgs	148,4 kgs	90	28

*1 Mesh Deep can be produced from 0.5MD to 75MD every 0.5MD in accordance with customer's request.

*2 Heat setting of the Netting can been done up to 35 Meters.

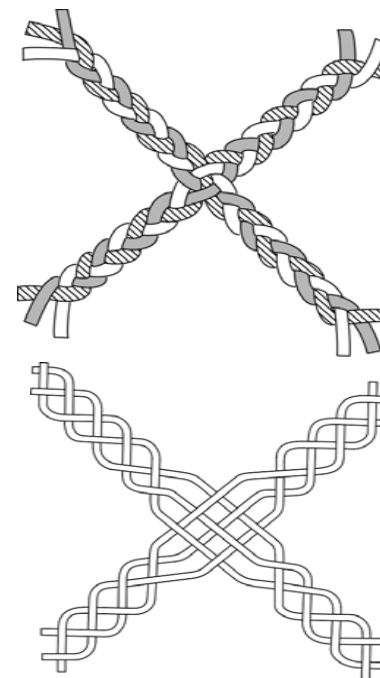

日東製網株式会社
NITTO SEIMO CO.,LTD